C019 - C022 LIVE BOTTOM MATERIAL HANDLER

BLEND
blendplants.com



Suitable for working in the city and in the most remote construction sites



Capacity from 19 to 22 m3






ADVANTAGES

- Simple and fast discharge with speed and opening adjustment;
- No risk of tipping;
- No interference with cables or equipment in work site;
- Usable in tunnels;


ACCESSORIES

- GPS and GPRS data transmission system;
- Discharge storage;
- Tarpaulin roof;
- Remote control;
- Camera on the rear;

CHARACTERISTICS

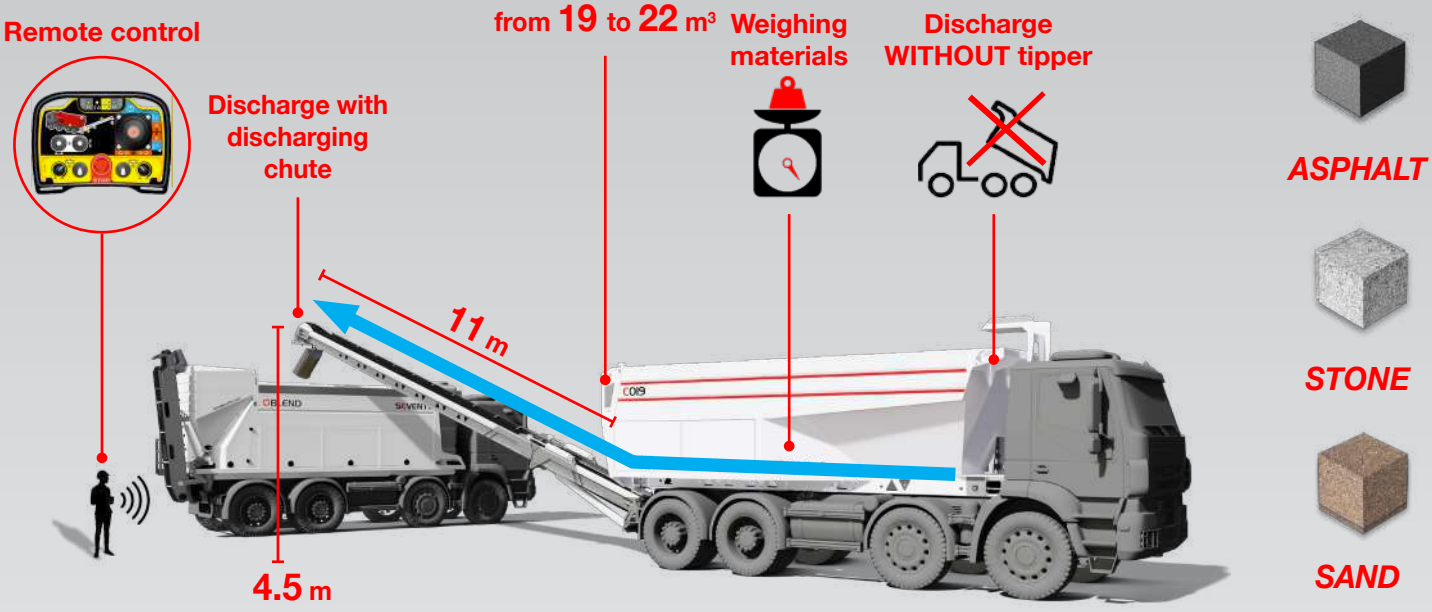

OPENING AND BELT DISCHARGING AREA

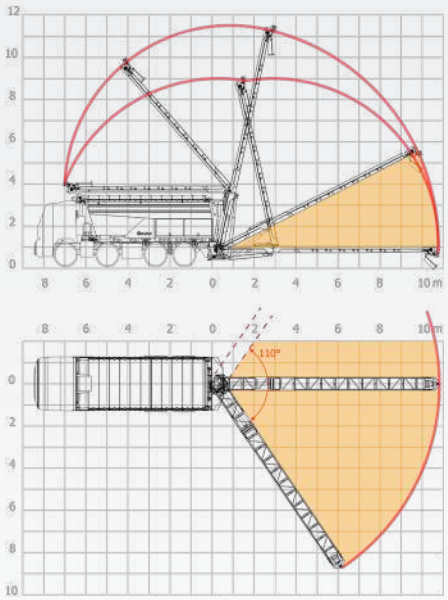



Structure	Hardox 450, thickness 4 mm
Capacity	**CO19** 19 m3
	CO22 22 m3
Discharge	Hydraulic opening of shore Dosing gate
Functioning	Hydraulic Truck bed with double pulling belt
External belt	Discharging chute Swivelling belt with double wheel
Belt dimensions	Lengh 11 m High max 4.5 m







MARZO 2022

ITALY - via Castegnato, 19 - 25050 Rodengo Saiano - Brescia
+39 030 7689730 - info@blendplants.com
blendplants.com